Product Data Sheet

GW40608

Gama 40 CDI



Gama de incinte de montare la nivel protejate IP40 oferă dimensiuni de la 2 la 72 de module, disponibile cu o uşă transparentă fumurie (potrivită în special pentru sectorul comercial şi industrial) sau o uşă goală (ideală pentru aplicaţii domotice). Acestea pot fi echipate cu reglete de borne bipolare şi unipolare, 80 A şi 125 A, cu cabluri cu şurub; acestea permit crearea de cabluri simple şi îngrijite, reducând timpul de configurare a carcasei.

Clasa de izolaţie	**II (conform standardelor IEC 61140)**	**Culoare**	**Alb RAL 9016**
Dim. exterioară LxHxD (mm)	**465x310x85**	**Grad de protecţie IP**	**IP40**
Instalare	**Perete DIN cărămidă**	**Putere dispersabilă (W)**	**50**
Rezistenţă mecanică	**IK08**	**Tensiune nominală**	**400 V**
Culoarea uşii	**Uşă transparentă fumurie**	**Nr. de module EN 50022**	**18**
Curent nominal	**125 A**	**Test de încercare cu fir incandescent**	**650 °C**
Temperatură de funcţionare	**-15 ÷ +60°C**	**Tip material**	**Fără halogeni în conformitate cu EN 60754-2**
Electrocod	**0311**	**Termo-presiune cu bilă**	**70 °C**
Standard	**EN 60670-1 (cei 23-48) IEC60670-24 cei 23-49**	**Tensiune de izolaţie**	**750 V**
Blocuri terminale max. instalabile	**1 x 18 module**		

BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

Saline solution	Acids		Bases		Solvents				Mineral oil	UV rays
	Concentrated	Diluited	Concentrated	Diluited	Hexane	Benzol	Acetone	Ethyl alcohol		
Resistant	Not resistant	Limited resistance	Not resistant	Limited resistance	Resistant	Not resistant	Not resistant	Limited resistance	Limited resistance	Limited resistance

DIMENSIONAL

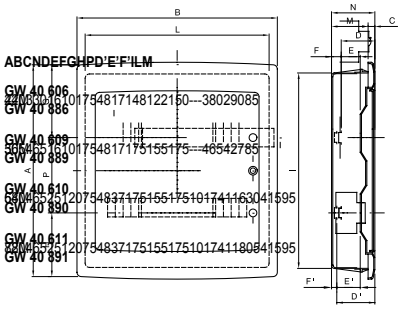

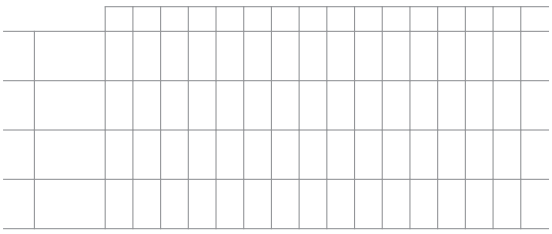

TECHNICAL SYMBOLOGY

EN 61140
II (conform standardelor IEC 61140)

IP
IP40

IK
IK08

GWT
650 °C

INSTALLATION
-15°C min
+60°C max
-15 ÷ +60°C

HF
HALOGEN FREE
Fără halogeni în conformitate cu EN 60754-2

70 °C

STANDARDS/APPROVALS

Reach Declaration

GEWISS S.p.A. Via Domenico Bosatelli 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09

www.gewiss.com
sat@gewiss.com
Last update 31/10/2026

Data, measures, designs and pictures are shown only as informative purposes, and could be changed without previous notice